ACM X

Power Supply

ACM-X/PS60

Overview

If the total current consumption of an ACM-X and its associated components exceeds 1500mA then an external power supply is required.

The ACM-X power supply is suitable for DIN rail mounting and is rated at 60Va

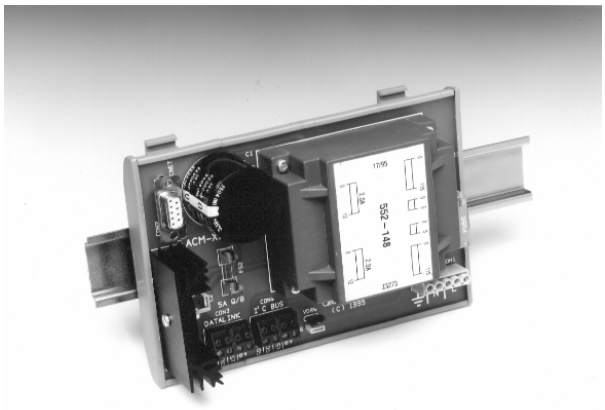

Specification

Colour :	Green techno polymer nylon (rated UL 94 V0).
Dimensions :	163(w) 113(h) 73 (d), depth measurement is from back plate of panel and includes DIN rail.
Weight :	1072kg
Storage temperature :	-65°C to 125°C.
Operating temperature:	0°C to 70°C.
Power supply :	240V.
Power consumption :	60Va.
Terminations :	Screw terminal connectors accept cable from 0.5 to 1.5mm diameter.

504 Dudley Road
Wolverhampton
West Midlands
WV2 3AA
Telephone 01902 560065
Fax 01902 560066
www.allen-martin.co.uk
Email: support@allen-martin.co.uk

Specifications may change without notice