




Overview

The ACM-X/RL8 is a DIN rail mounting eight way relay board. It comes complete with relays and features test links and status indicators. Guides are provided to mount an ACM-X/D08 card.

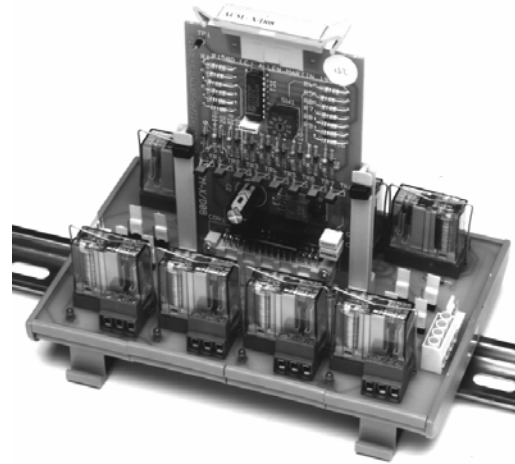

Specification

Colour :	Green Techno polymer nylon (rated UL 94 V0).
Dimensions :	168(w) 113(h) 160(d) mm. depth measurement is from back plate of panel, includes DIN rail, and assumes D08 module is fitted.
Weight :	400g.
Storage temperature :	-65°C to 125°C.
Operating temperature :	0°C to 70°C.

Relay contacts :	10A resistive, 3A inductive at 250Vac.
Coils :	12Vdc.

Power Supply :	12-15V.
Power consumption :	400mA.
Terminations :	Screw terminal connectors accept cable from 0.5 to 1.5mm diameter.
